

# KENT S

## SPECIFICATIONS


<b>MOUNTING</b>		<b>TRACK</b>
POWER	[W]	15
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1410 / 1465 / 1565
LIGHT COLOUR	[K]	2700 / 3000 / 4000
CRI		>90
BEAM ANGLE	[°]	30 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	94
<b>POWER SUPPLY</b>		<b>220-240V AC 50/60 Hz</b>
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		-
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,62
GROSS WEIGHT	[kg]	0,65
<b>COLOUR (HOUSING)</b>		<b>WHITE ~RAL9003</b>
<b>COLOUR (HOUSING)</b>		<b>BLACK ~RAL9005</b>

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION

30°

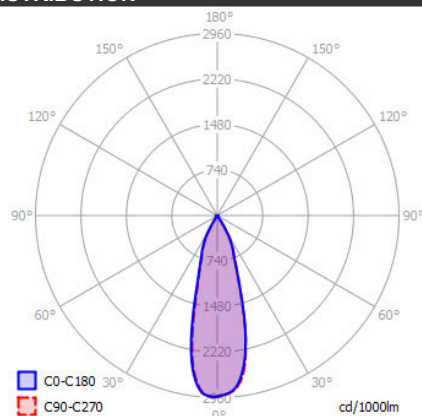

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	10 / 18 / 38
SNOOT		BLACK
HONEY COMB LOUVER		BLACK
FILTER LENS		LINEAR DIFFUSION
FILTER LENS		PRISMATIC DIFFUSION




## Colours




white

black

## TRACK MOUNTING



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING