

# LARA

## SPECIFICATIONS

MOUNTING		WALL	
POWER	[W]	7	
LAMP		built-in LED	
LUMINOUS FLUX*	[lm]	590	
LIGHT COLOUR	[K]	2700	
CRI		>90	
BEAM ANGLE	[°]	15	
AVERAGE LIFETIME	[h]	L80/B50.000	
LUMINOUS EFFICACY	[lm/W]	84	
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz	
LED-DRIVER		INCLUDED	
DIMMING		NO	
THROUGH-WIRING		NO	
MATERIAL		ALUMINUM	
INGRESS PROTECTION		IP20	
PROTECTION CLASS		I	
NET WEIGHT	[kg]	0,53	
GROSS WEIGHT	[kg]	0,55	
COLOUR (HOUSING)		BLACK ~RAL9005	n/a



## LIGHT DISTRIBUTION

n/a

\*Luminous flux values are nominal LED data at a operating temperature of 25° C


## OPTIONS / OPTIONAL ACCESSORIES

### Colours




black

## MOUNTING DIMENSIONS (DRILLING TEMPLATE)

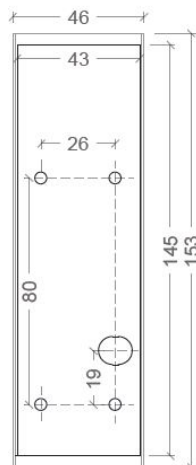

## FIXTURE DIMENSIONS

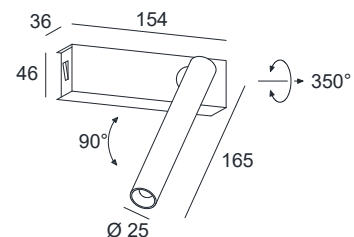

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING