


# PIPER

## SPECIFICATIONS

<b>MOUNTING</b>		<b>CEILING</b>
POWER	[W]	15
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1760
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	117
<b>POWER SUPPLY</b>		<b>220-240V AC 50/60 Hz</b>
LED-DRIVER		<b>INCLUDED</b>
DIMMING		<b>ON/OFF or PHASE DIM</b>
THROUGH-WIRING		<b>YES</b>
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		<b>IP20</b>
PROTECTION CLASS		<b>I</b>
NET WEIGHT	[kg]	1,36
GROSS WEIGHT	[kg]	1,40
<b>COLOUR (HOUSING)</b>		<b>WHITE ~RAL9003</b>
<b>COLOUR (HOUSING)</b>		<b>BLACK ~RAL9005</b>




## LIGHT DISTRIBUTION

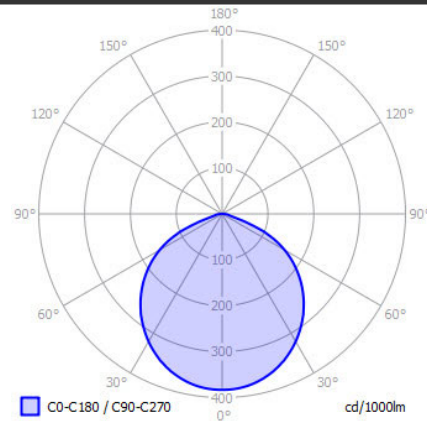


\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

### Colours



## MOUNTING DIMENSIONS



## FIXTURE DIMENSIONS

