




Ambrosia

Ciszak Dalmas


marset



Ambrosia 120




Ambrosia 180



(1) The height can be increased by means of the 40 or 60 cm poles (max. 3 units per each side) They can be combined.

(2) Lightpoint

Canopy

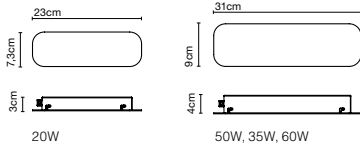

Pole



Power supply (RSC)

- Power supply 20W - 24V - Clase II - Triac
- Power supply 50W - 24V - Clase II - Triac
- Power supply 35W - 24V - Clase II - DALI
- Power supply 60W - 24V - Clase II - DALI

Aluminium structure. Methacrylate light tube.

- Black
- Matt Gold

Ambrosia 120

Light source Ambrosia 22K:
LED SMD 24Vdc 19,2W 2200K CRI80 2116lm
Luminaire Ambrosia 22K:
(Power supply not included) 1885lm

Light source Ambrosia 27K:
LED SMD 24Vdc 19,2W 2700K CRI90 2028lm
Luminaire Ambrosia 27K:
(Power supply not included) 1891lm

Light source Ambrosia 30K:
LED SMD 24Vdc 19,2W 3000K CRI90 2256lm
Luminaire Ambrosia 30K:
(Power supply not included) 1927lm

Ambrosia 180

Light source Ambrosia 22K:
LED SMD 24Vdc 28,8W 2200K CRI80 3174lm
Luminaire Ambrosia 22K:
(Power supply not included) 2823lm

Light source Ambrosia 27K:
LED SMD 24Vdc 28,8W 2700K CRI90 3042lm
Luminaire Ambrosia 27K:
(Power supply not included) 2833lm

Light source Ambrosia 30K:
LED SMD 24Vdc 28,8W 3000K CRI90 3384lm
Luminaire Ambrosia 30K:
(Power supply not included) 2886lm

The starting point for the Ambrosia was to bring back the traditional Linestra lamp to update it and show that a technical, resolute design can also be poetic.



dimmable*



*It depends on the purchased power supply, Triac o DALI. 24V remote power supply to be ordered separately.


- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D
- [Download](#) Energy label

Watch the video

info@marset.com
www.marset.com




Ambrosia 210



(1) The height can be increased by means of the 40 or 60 cm poles (max. 3 units per each side). They can be combined.

(2) Lightpoint

Ambrosia 315

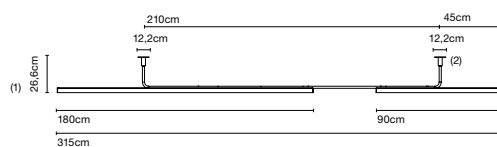

Aluminium structure. Methacrylate light tube.

- Black
- Matt Gold

Ambrosia 210

Light source Ambrosia 22K:
LED SMD 24Vdc 28,8W 2200K CRI80 3174lm
Luminaire Ambrosia 22K:
(Power supply not included) 2802lm

Light source Ambrosia 27K:
LED SMD 24Vdc 28,8W 2700K CRI90 3042lm
Luminaire Ambrosia 27K:
(Power supply not included) 2812lm

Light source Ambrosia 30K:
LED SMD 24Vdc 28,8W 3000K CRI90 3384lm
Luminaire Ambrosia 30K:
(Power supply not included) 2865lm


Ambrosia 315

Light source Ambrosia 22K:
LED SMD 24Vdc 43,2W 2200K CRI80 4761lm
Luminaire Ambrosia 22K:
(Power supply not included) 4220lm

Light source Ambrosia 27K:
LED SMD 24Vdc 43,2W 2700K CRI90 4563lm
Luminaire Ambrosia 27K:
(Power supply not included) 4235lm

Light source Ambrosia 30K:
LED SMD 24Vdc 43,2W 3000K CRI90 5076lm
Luminaire Ambrosia 30K:
(Power supply not included) 4314lm

Canopy

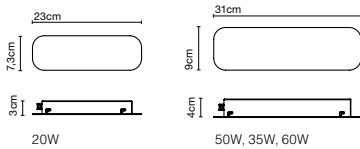

Pole



Power supply (RSC)

- Power supply 20W - 24V - Clase II - Triac
- Power supply 50W - 24V - Clase II - Triac
- Power supply 35W - 24V - Clase II - DALI
- Power supply 60W - 24V - Clase II - DALI

The starting point for the Ambrosia was to bring back the traditional Linestra lamp to update it and show that a technical, resolute design can also be poetic.



dimable*



*It depends on the purchased power supply, Triac o DALI. 24V remote power supply to be ordered separately.

- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D
- [Download](#) Energy label

Watch the video

info@marset.com
www.marset.com